



TOYO SYSTEM USA

TOSCAT-3300K



(Compact size portable TOSCAT-3200)

Just in time (Quick test)

Compact, Portable and Easy operation

CC/CV, CP, CCP for various driving simulation

AC Impedance measurement (Option)

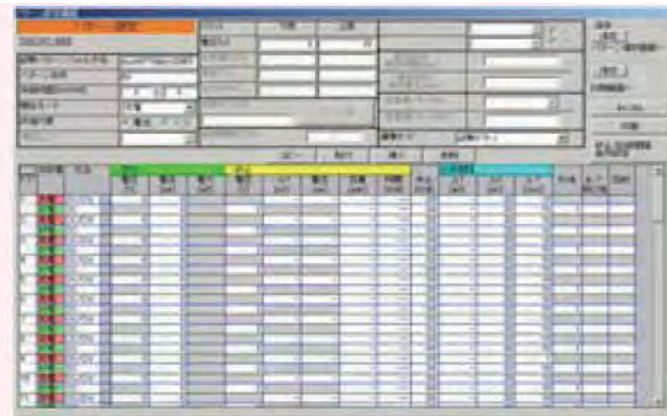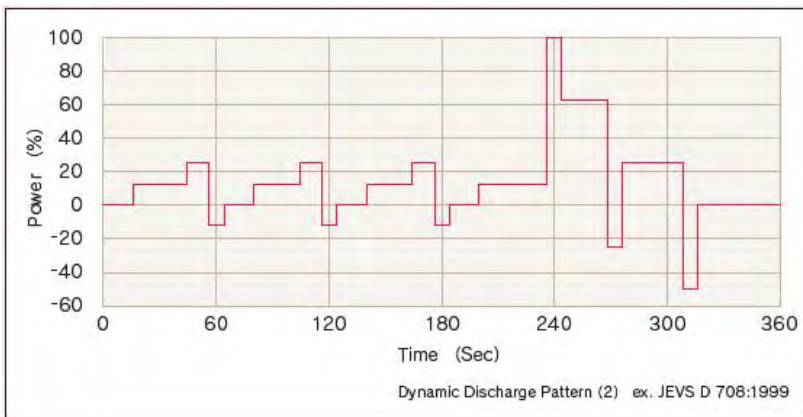

TOSCAT (Battery Testing facilities & Jigs)

Battery (Performance & Safety) **Testing Service**

TOSMAC (Battery manufacturing and safety testing facilities)

Customized pack business

TOSCAT-3300K

(Compact size portable TOSCAT-3200)

Number of Channels		8[CH/Unit]	
Operating Conditions		Charging	cc, cc/ cv, cp
		Discharging	cc, cc/ cv, cp
Output Voltage Range (VDC)		0 ~ 6[V]	
Output Current Range (ADC)		0 ~ 3[A]	
Output	Constant Voltage	Resolution	1[mV]
		Stability	Less than ± 0.1 [%] of output voltage F.S
	Constant Current	Range	3[A]/500[mA]/50 [mA]/5[mA]
		Stability	Less than ± 0.1 [%] of each range F.S
Measurement	Battery Voltage	Range	-2 ~ 6[V]
	Current	Range	0 ~ 3[A]
	Extended Voltage	Range	0 ~ 10[A]
	Sampling Interval		10[ms]
External Dimensions		440W × 200H × 450D[mm]	
Weight		19.8[kg]	

